

## Safe-D 20mm + 25mm Conduit Saddles



Provides a 3mm stand off from the surface



Simply wrap around the conduit, perfect for tight spaces



Secure conduit with locking tab



Centralised base fixing, gives a neat appearance to installation


**Safe-D Conduit Saddles combine fire performance, quickest fix, and a modern look, to secure cables in 20mm & 25mm outer diameter PVC and galvanised conduit installations... & 20mm or 25mm o/d cables and pipes.**

Compared to traditional saddles, where lids must be secured to bases, there is no separate lid - the conduit (and cables) is held by the wrap-design, which has an end tab that simply fits through the opposing slot to enable a secure lock.

The tight wrap, that eliminates need for wide-bases, is ideal also for installations in tight spaces.

**1 piece for only 1 fixing!**

- Compliant with BS7671 and BS5839-1 requirements
- >1200°C melting point
- Non-corrosive finish
- Unique single piece fixing, only 1x screw required
- Fixing hole is ideal for use with D-Line D-Fixings
- Available in white, black or galvanised finish
- Adjustable slot in base for fixings

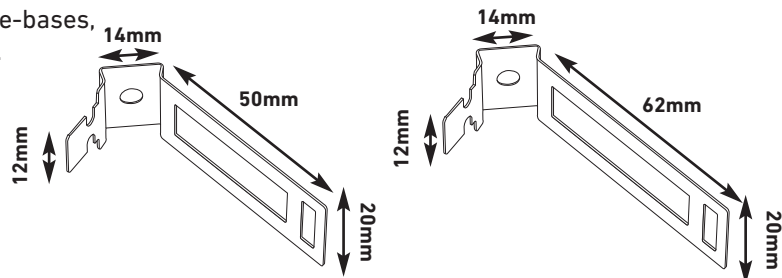

**Code**

**Description**

<b>SAFE-DCOND20</b>	(L) 86.19mm x (W) 20mm x (H) 23mm (folded - max height)
<b>SAFE-DCOND20W</b>	(L) 86.19mm x (W) 20mm x (H) 23mm (folded - max height)
<b>SAFE-DCOND20B</b>	(L) 86.19mm x (W) 20mm x (H) 23mm (folded - max height)
<b>SAFE-DCOND25</b>	(L) 100mm x (W) 20mm x (H) 28mm (folded - max height)
<b>SAFE-DCOND25W</b>	(L) 100mm x (W) 20mm x (H) 28mm (folded - max height)
<b>SAFE-DCOND25B</b>	(L) 100mm x (W) 20mm x (H) 28mm (folded - max height)